

Schur[®]Star 2060-C

Bagging System with numerous options

Flexibility and Efficiency

The entire Schur[®]Star product range has been developed with a view to optimizing the packing process and the finished package, e.g. by optimizing filling conditions which, make the packing process very user-friendly whilst also ensuring high volumes. Additionally, the model 2060-C offers incredible short change-over times and very low waste levels, even when making frequent change overs. The 2060-C model is available for automated or manual filling.



Accessories

- Supporting conveyor
- Opener/closer, recloseable zipper
- Base opening unit
- Filling funnels
- Air extraction system
- Compression unit
- Bag vibrating system
- System for continuous filling of bags
- Gas flush unit
- Sealing system for sealing around handle or euroslot
- Marking equipment - Thermal transfer, inkjet or labelling
- Servo driven

Schur[®] Star Systems Inc.

USA Carlsbad, CA 92010 | Tel. 760-688-7356 | schurstarusa@schur.com

Schur[®]Technology

DEN 8700 Horsens | Tel. + 45 79 28 29 28 | sta@schur.com

Technical Specifications

Modell

Schur®Star 2060-C, Stainless steel AISI 304.

Bag Feeding

Continuous with a pre-selected feeding speed. Intermittently with a pre-selected number of bags per cycle.
Automatically with a variable stopping time per cycle for manual or automated filling.

Packaging Speed

Variable bag feeding between 10 and 98 feet/min.
(3 and 30 m/min.)

Capacity

Max. 80 bags/min. by continuous operation, depending on bag size and product being filled.
Max. 35 bags/min by intermittent operation, depending on bag size and product being filled.
One bag being filled at a time.

Bag Change-over

4-5 minutes.

Bag Dimension

Max. width 18 inches (450 mm).
Length 20 inches (500 mm).
Min. width 4 inches (100 mm).
Length 4 inches (100 mm).
(Different formats on request).

Power Supply

3 x 480 VAC + 0 + PE, 60Hz, 3,5 kW.

Air Supply

700 kPa, Consumption: 140 l/min. (ANR).

Control System


Allen Bradley Compactlogix 1769-L27EMR.

Weight

1433 pounds (650 kg).

Bag Material

PE, CPP, coextruded films and laminates.
Max. 0.0055" (0,140 mm).
Min. 0.0016" (0,040 mm).

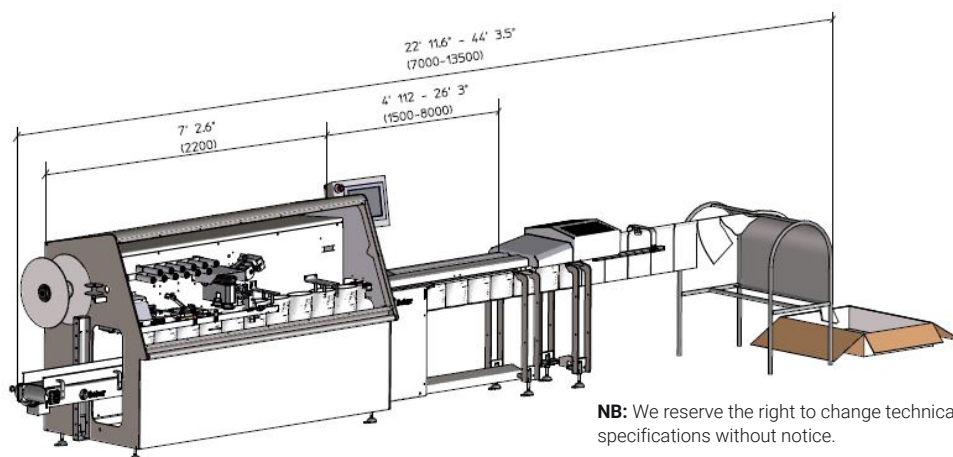

NB: We reserve the right to change technical specifications without notice.

Applications

- Food industry
- Non-food industry
- Pharmaceutical industry
- Chemical industry
- Small or medium batch productions
- Medium or high capacity

Schur® Star Systems Inc.

USA Carlsbad, CA 92010 | Tel. 760-688-7356 | schurstarusa@schur.com

Schur® Technology

DEN 8700 Horsens | Tel. +45 79 28 29 28 | sta@schur.com