


NEWTEC WEIGHING MACHINE 4015XB2

UP TO 100
PORTIONS
PER MINUTE

ALSO AVAILABLE
FOR CARROTS

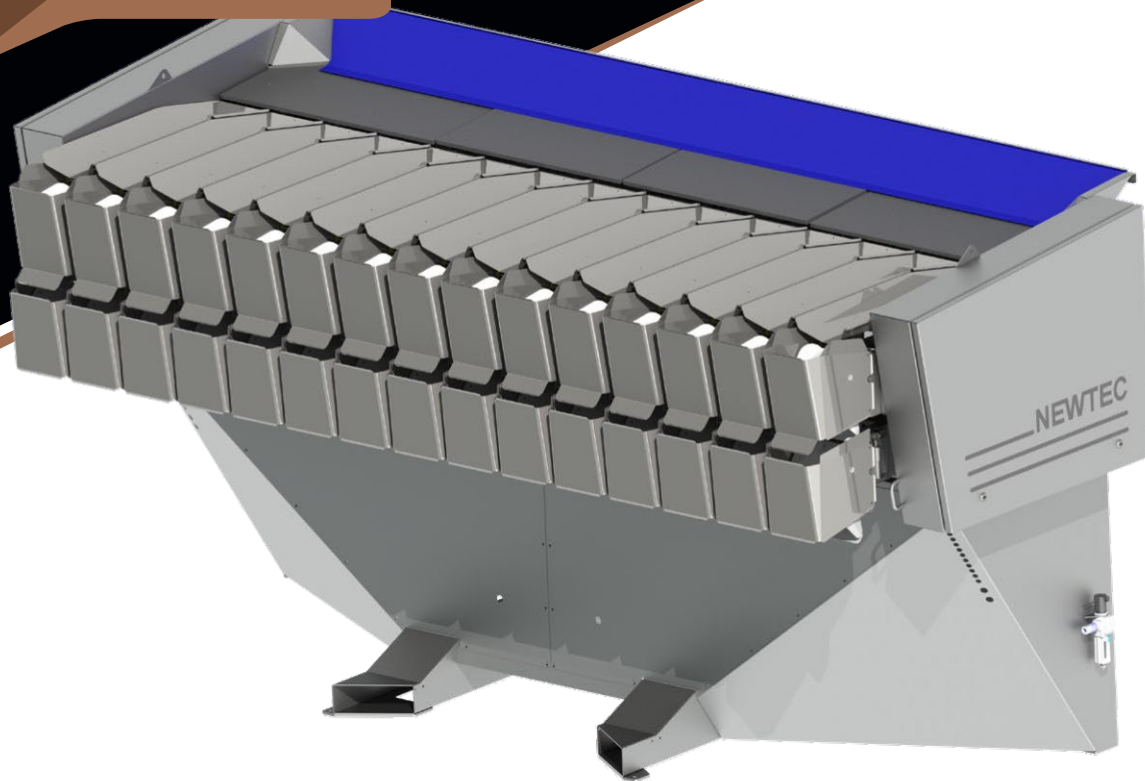

High speed & weighing accuracy

Advantages

- High weighing accuracy: Typical giveaway: less than 0.3%
- High speed – up to 100 portions / min. at 2,5 kg.
- Flexible system to handle large as well as small vegetables and fruits
- Gentle product handling with low drop height
- Option: Newtec WebServices for remote servicing, data collection and analysis
- Option: Newtec MachineLink for easy control of more Newtec machines from only one touchscreen

Application

Washed vegetables and fruits such as:

- Potatoes • Carrots (G-model) • Onions
- Citrus • Similar fruits and vegetables




WEBSERVICES AVAILABLE
FOR REMOTE SERVICING

YOUR ADVANTAGES

- Robust stainless steel construction
- No tools required for dismantling and assembly of weigh pans
- Easy access for cleaning and service
- Small footprint

SOLUTION FOR CARROTS

OPTION

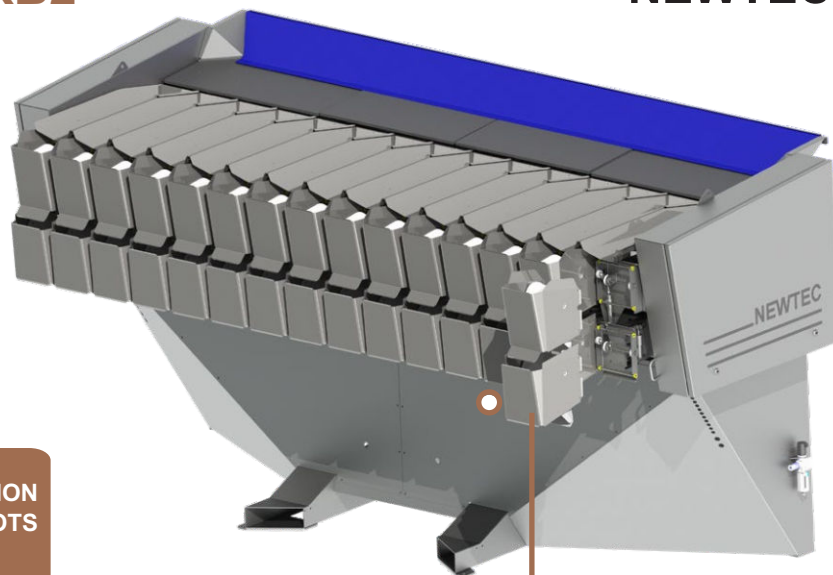


Detachable weigh heads

- Model 4015XB2G for carrots
- With a unique feature for optimal alignment and distribution of the

NEWTEC SOFTWARE

- Intuitive user interface
- Informative and upgradable
- Same user interface on all Newtec weighing and

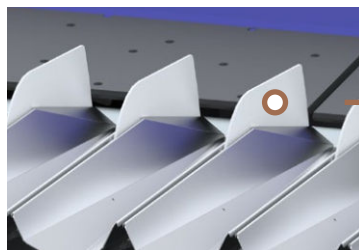

Carrot divider



WEIGHING MACHINE WITH 15 CHANNELS

Speed / Capacity Up to 100 portions / min. at 2,5 kg.

Portion sizes 1 - 10 kg.
(depending on product)

Weigh head volume 3,5 L.

Weigh head width 180 mm.

Material According to the EU/FDA rules on food contact materials

Protection class IP54



Air requirement

Connection 3/8"
Min. pressure 6 bar (0.6 Mpa)
Consumption 65 NL/min.

Electrical requirement 3 x 220 VAC or 3x400 VAC (N)
PE 50/60 Hz 3-6kW

Environment 5°C – 40°C

Weight 990 kg.
(excl. portion collection system)

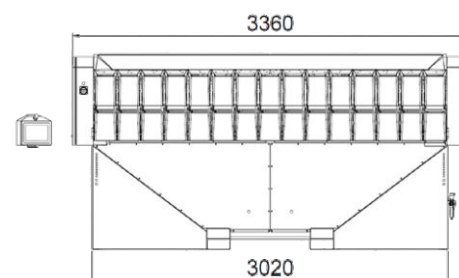

CAPACITY PORTIONS / POTATOES MIN. UP TO:

1 kg.	13
2.5 kg.	0
5 kg.	10
	8
	5
	3

